





# Solutions always by your side

## 2 labels: total solutions for your applications

The automation of industrial machinery and equipment addresses human and financial challenges of security and productivity.

Our leadership in the nuclear market with more than 120 reactors installed worldwide and our continuous experience from the 70's have shaped our expertise and our control of processes.

Our understanding of industrial processes drives the design and manufacturing of our electrical actuators. Our vision of controls furthers the appearance of solutions fully adapted to markets' evolutions and to our customers' budgetary and technological requirements.

That is why our electromechanical profile has developed into an expertise in the management of evermore complex systems.

BERNARD CONTROLS propose 2 labels which federate well different ranges of actuator solutions:



### THE ESSENTIALS

In case of **moderate environmental and operational constraints**, BERNARD CONTROLS has created the FIRST BC label to identify **products and solutions which offer to users The Essentials**: the key functions to **operate your valve safely and efficiently in case of standard applications**.



### THE COMPLETE SOLUTION

The BC PREMIUM label guarantees **"The complete solution", with many options and possible configurations to fit at best very specific needs**. It is the guarantee of quality and security for installations' actuation in the case of **severe environment, demanding operational constraints and critical applications**.

## Contents

Solution always by your side	>	2	Range Overview with		
Innovation always by your side	>	3	Duty and Modulating Classification	>	14
A dedicated guide to define your			Focus on		
model of actuator	>	4	BC Technologies & Services	>	16
Focus on Operation	>	6	Specifications	>	18



# Innovation always by your side

## GPS Actuator

➤ The best way to find your electric actuation solution

GPS Actuator is the web application developed by BERNARD CONTROLS that helps you find your way to your electric actuation solution.

As suggested by its name, the GPS function of this application simply drives you to the best solution to your needs, following 5 key steps.

[www.gpsactuator.com](http://www.gpsactuator.com)



Flash this QR code and access BC GPS Actuator!





# A dedicated Guide

to define your model of actuator

Using the GPS actuator, you will end up with a range of BERNARD CONTROLS' electric actuators.

This Guide continues the selection process and helps you to finalize your request taking into account all parameters and options.


Review each step of the GPS Actuator selection with comments on the right page. Then, read through data and additional explanations on next pages and fill in the detachable specification sheet at the end of the document.

You will be sure to consider all criteria to select the appropriate actuation solution.

At any time, BERNARD CONTROLS teams are available for support. From basic quotation to specific design or project design, do not hesitate to contact our sales teams. They can help you to fill in the form and inform about only options or technologies.




# 1 Movement to operate the valve

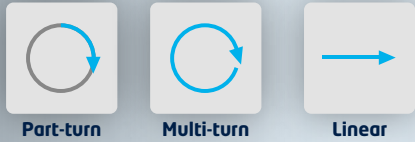


> Movement selection has to be completed with data about your valve to ensure good fitting of the actuator to your valve.

# 2 Environment

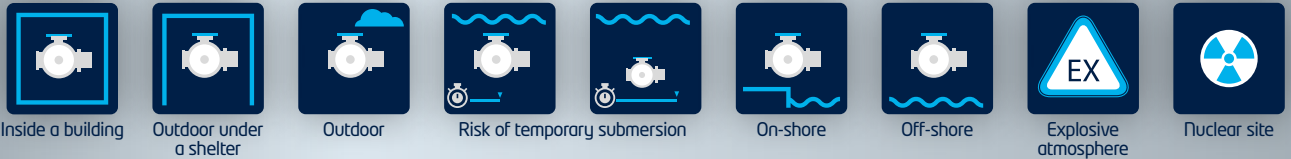

> Location and working environment impose to specify watertightness level, enclosure protection...

# 3 Operation

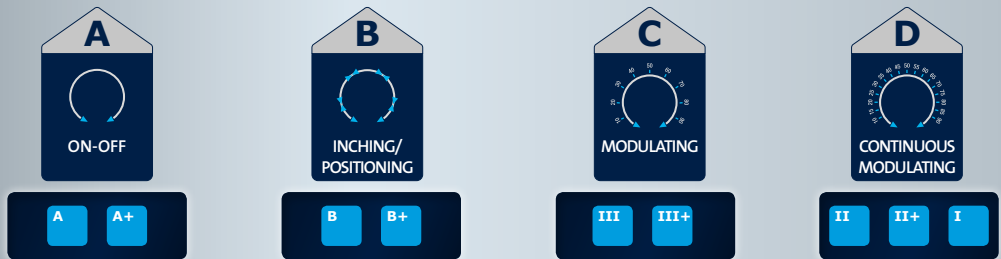

> BC GPS Actuator presents Duty and Modulating Classification. More information on pages 6 to 15.

# 4 Security



# 5 Control



> Choice of controls has to be completed with options, security requirement, electric connections, signaling information ...



**Additional options and information to be selected on the specification sheet at the end.**







# Focus on Operation

## Actuator Duty & Modulating Classification

Operation is a decisive step in your electric actuator selection. Looking carefully at your process requirement will make the difference.

### > Actuator Duty

The EN 15714-2 Standard defines 4 actuator duties with basic design requirements per movement to operate the valve: part-turn, multi-turn and linear.

 <p><b>Class A</b> <b>On-Off</b></p> <p>The actuator is required to drive the valve through its <b>entire travel from the fully open position to the fully closed position</b> or vice-versa.</p>	 <p><b>Class B</b> <b>Inching / Positioning</b></p> <p>The actuator is required to <b>occasionally drive</b> the valve to any position.</p>	 <p><b>Class C</b> <b>Modulating</b></p> <p>The actuator is required to <b>frequently drive</b> the valve to any position between fully open and fully closed.</p>	 <p><b>Class D</b> <b>Continuous modulating</b></p> <p>The actuator is required to <b>continuously drive</b> the valve to any position between fully open and fully closed.</p>
--	--	--	--

Relying on its experience and on years of customers' feedbacks, BERNARD CONTROLS considers that these 4 types of operation must be specified with key criteria in order to define the unique appropriate solution to the process requirement of each customer.

### > On-Off & Positioning: Increase ENDURANCE

Considering On-Off applications (Class A) and Inching/Positioning applications (Class B), process requirements imply to set ENDURANCE as the decisive criteria. Number of cycles, i.e. life time of the actuator, will make the difference for the customer and his application.

### > Modulating & Continuous Modulating: Improve PERFORMANCE

Modulating and Continuous Modulating applications require specific expertise to define the most appropriate solution. For many years BERNARD CONTROLS has been a leader in electric actuation and a forerunner in modulating technology. Our modulating classification (Class III which complies with EN15714-2 Modulating Class C and Classes II & I which comply with EN15714-2 Continuous modulating Class D) is now well-known from our customers and has, in fact, inspired the EN 15714-2 Standard.

Duty PERFORMANCE is the main criterion to fully address modulating process requirements, but needs to be specified and completed with additional performance criteria.

BERNARD CONTROLS sets 4 additional performance criteria to EN15714-2 basic design requirements:


+ RESOLUTION \*

+ Response Time \*

+ Dead Band \*

+ Linearity \*

These criteria determine the efficiency of the modulating process.

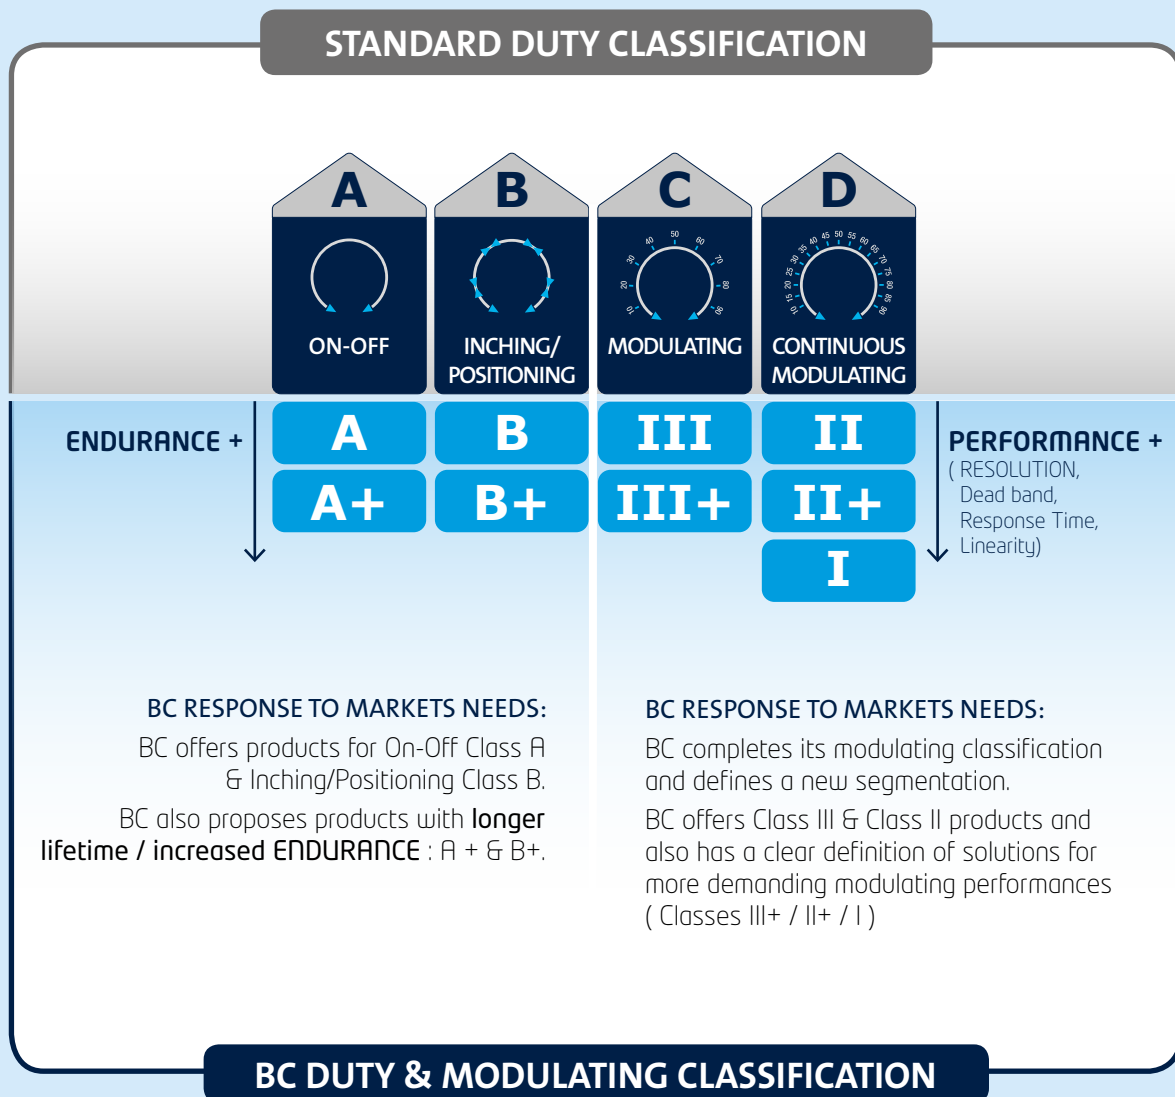

Find detailed data per movement and classes on next pages and BERNARD CONTROLS product offer with available classes on pages 14 & 15.

#### DEFINITIONS\*

- **RESOLUTION:** the smallest achievable step at the output shaft of the electric actuator.
- **DEAD BAND:** the range through which an input signal may vary, upon reversal of direction, without triggering any observable change in the position of the valve.
- **RESPONSE TIME:** the time needed by the actuator to reach position following an input signal change.
- **LINEARITY:** the percentage of change in input signal must approximate the percentage of the change at the output of the actuator.



# Part - Turn Actuator



## Class A On - Off



## Class B Inching / Positioning

Actuator duty  
STANDARD CLASSIFICATION

### ON - OFF EN 15714 - 2 Standard Duty Class A

Torque lbs.in	Duty Performance cycles per hour	Endurance <sup>(1)</sup> number of cycles
< 1115	15	10 000
1115-8850	10	10 000
8851-35400	5	5 000
35401-283200	5	2 500
> 283200	5	1 000

(1) Endurance Test Requirement Standard EN 15714 - 2

### INCHING / POSITIONING EN 15714 - 2 Standard Duty Class B

Torque lbs.in	Duty Performance starts per hour	Endurance <sup>(1)</sup> number of cycles
< 1115	120	10 000
1115-8850	60	10 000
8851-35400	30	5 000
35401-283200	15	2 500
> 283200	5	1 000

(1) Endurance Test Requirement Standard EN 15714 - 2

### ENDURANCE CRITERIA

#### A

#### ON - OFF Endurance Class A

Torque lbs.in	Duty Performance cycles per hour	Endurance <sup>(1)</sup> number of cycles
< 1115	15	10 000
1115-8850	10	10 000
8851-35400	5	5 000
35401-283200	5	2 500
> 283200	5	1 000

(1) Endurance Test Requirement Standard EN 15714 - 2

#### B

#### INCHING / POSITIONING Endurance Class B

Torque lbs.in	Duty Performance starts per hour	Endurance <sup>(1)</sup> number of cycles
< 1115	120	10 000
1115-8850	60	10 000
8851-35400	30	5 000
35401-283200	15	2 500
> 283200	5	1 000

(1) Endurance Test Requirement Standard EN 15714 - 2

#### A+

#### ON - OFF Endurance Class A+

Torque lbs.in	Duty Performance cycles per hour	Endurance <sup>(2)</sup> number of cycles
< 1115	15	100 000
1115-8850	10	30 000
8851-35400	5	10 000
35401-283200	5	5 000
> 283200	5	2 000

(2) Endurance Higher Level than Standard EN 15714 - 2

#### B+

#### INCHING / POSITIONING Endurance Class B+

Torque lbs.in	Duty Performance starts per hour	Endurance <sup>(2)</sup> number of cycles
< 1115	120	100 000
1115-8850	60	30 000
8851-35400	30	10 000
35401-283200	15	5 000
> 283200	5	2 000

(2) Endurance Higher Level than Standard EN 15714 - 2

Process Requirements  
BC DUTY & MODULATING CLASSIFICATION

### DEFINITIONS

- Torque is based on EN ISO 5211
- One cycle consists of nominal 90° angular travel in both directions (i.e. 90° to open + 90° to close), based on an average load of at least 30 % of the rated torque with the ability to transmit 100 % of the rated torque for at least 5 % at each end of travel. For angular travel other than 90°, the endurance shall be agreed between the purchaser and the manufacturer/supplier.
- One start consists of a movement of at least 1 % in either direction, with a load of at least 30 % of the rated torque.
- TBA: To be agreed between manufacturer / supplier and purchaser.

# Design requirements per classes



## Class C Modulating

### MODULATING EN 15714 - 2 Standard Duty Class C

Torque lbs.in	Duty <sup>(1)</sup> Performance starts per hour	Endurance number of starts
< 1115	1 200	1 800 000
1115-8850	600	1 200 000
8851-35400	300	500 000
35401-283200	60	250 000
> 283200	30	T. B. A.

(1) Duty Performance Standard EN 15714 - 2



## Class D Continuous Modulating

### CONTINUOUS MODULATING EN 15714 - 2 Standard Duty Class D

Torque lbs.in	Duty <sup>(1)</sup> Performance starts per hour	Endurance number of starts
< 1115	3 600	10 000 000
1115-8850	1 800	10 000 000
8851-35400	600	5 000 000
35401-283200	N.A.	T. B. A.
> 283200	N.A.	T. B. A.

(1) Duty Performance Standard EN 15714 - 2

## PERFORMANCE CRITERIA

### III

MODULATING Performance Class III			Additional performance criteria			
Torque lbs.in	Duty <sup>(2)</sup> Performance starts per hour	Endurance number of starts	Resolution % and Number step mini	Dead band % Maxi	Reponse time sec	Linearity %
< 1115	1 200	1 800 000	<2% 50	±1%	<2s	2%
1115-8850	1 200	1 200 000	<2% 50	±1%	<2s	2%
8851-35400	1 200	500 000	<2% 50	±1%	<2s	2%
35401-283200	1 200	250 000	<2% 50	±1%	<2s	2%
> 283200	1 200	T. B. A.	<2% 50	±1%	<2s	2%

(2) Duty Performance Higher Level than Standard EN 15714 - 2

### III+

MODULATING Performance Class III+			Additional performance criteria			
Torque lbs.in	Duty <sup>(2)</sup> Performance starts per hour	Endurance <sup>(2)</sup> number of starts	Resolution % and Number step mini	Dead band % Maxi	Reponse time sec	Linearity %
< 1115	1 200	3 000 000	<1% 100	±0.5%	<2s	2%
1115-8850	1 200	2 000 000	<1% 100	±0.5%	<2s	2%
8851-35400	1 200	1 000 000	<1% 100	±0.5%	<2s	2%
35401-283200	1 200	500 000	<1% 100	±0.5%	<5s	2%
> 283200	1 200	T. B. A.	<1% 100	±0.5%	<10s	2%

(2) Duty Performance and Endurance Higher Level than Standard EN 15714 - 2

## PERFORMANCE CRITERIA

### II

CONTINUOUS MODULATING Performance Class II			Additional performance criteria			
Torque lbs.in	Duty <sup>(2)</sup> Performance starts per hour	Endurance number of starts	Resolution % and Number step mini	Dead band % Maxi	Reponse time sec	Linearity %
< 1115	3 600	10 000 000	<1.5% 67	±0.75%	<2s	2%
1115-8850	1 800	10 000 000	<1.5% 67	±0.75%	<2s	2%
8851-35400	1 800	5 000 000	<1.5% 67	±0.75%	<2s	2%
35401-283200	N.A.	T. B. A.	<1.5% 67	±0.75%	<2s	2%
> 283200	N.A.	T. B. A.	<1.5% 67	±0.75%	<2s	2%

(2) Duty Performance Higher Level than Standard EN 15714 - 2

### II+

CONTINUOUS MODULATING Performance Class II+			Additional performance criteria			
Torque lbs.in	Duty <sup>(2)</sup> Performance starts per hour	Endurance <sup>(2)</sup> number of starts	Resolution % and Number step mini	Dead band % Maxi	Reponse time sec	Linearity %
< 1115	3 600	20 000 000	<1% 100	±0.5%	<2s	2%
1115-8850	1 800	20 000 000	<1% 100	±0.5%	<2s	2%
8851-35400	1 800	5 000 000	<1% 100	±0.5%	<2s	2%
35401-283200	1 200	T. B. A.	<1% 100	±0.5%	<5s	2%
> 283200	1 200	T. B. A.	<1% 100	±0.5%	<10s	2%

(2) Duty Performance and Endurance Higher Level than Standard EN 15714 - 2

### I

CONTINUOUS MODULATING Performance Class I			Additional performance criteria			
Torque lbs.in	Duty <sup>(2)</sup> Performance starts per hour	Endurance <sup>(2)</sup> number of starts	Resolution % and Number step mini	Dead band % Maxi	Reponse time sec	Linearity %
< 1115	3 600 ↗	50 000 000	<0.25% 400	±0.13%	<1s	2%
1115-8850	1 800 ↗	50 000 000	<0.25% 400	±0.13%	<1s	2%
8851-35400	1 800 ↗	20 000 000	<0.25% 400	±0.13%	<1s	2%
35401-283200	N.A.	T. B. A.	<0.25% 400	±0.13%	<2s	2%
> 283200	N.A.	T. B. A.	<0.25% 400	±0.13%	<3s	2%

(2) Duty Performance and Endurance Higher Level than Standard EN 15714 - 2



# Multi - Turn Actuator



## Class A On - Off



## Class B Inching / Positioning

Actuator duty  
STANDARD CLASSIFICATION

### ON - OFF EN 15714 - 2 Standard Duty Class A

Torque lbs.in	Duty Performance running time/hour	Endurance <sup>(1)</sup> number of cycles
< 890	15	10 000
891-6,200	15	10 000
6,201-22,120	15	5 000
22,121-88,500	15	2 500
> 88,500	15	1 000

(1) Endurance Test Requirement Standard EN 15714 - 2

### INCHING / POSITIONING EN 15714 - 2 Standard Duty Class B

Torque lbs.in	Duty Performance starts per hour	Endurance <sup>(1)</sup> number of cycles
< 890	30	10 000
891-6,200	20	10 000
6,201-22,120	15	5 000
22,121-88,500	10	2 500
> 88,500	5	1 000

(1) Endurance Test Requirement Standard EN 15714 - 2

Process Requirements  
BC DUTY & MODULATING CLASSIFICATION

### ENDURANCE CRITERIA

**A**

#### ON - OFF Endurance Class A

Torque lbs.in	Duty Performance running time/hour	Endurance <sup>(1)</sup> number of cycles
< 890	15	10 000
891-6,200	15	10 000
6,201-22,120	15	5 000
22,121-88,500	15	2 500
> 88,500	15	1 000

(1) Endurance Test Requirement Standard EN 15714 - 2

**A+**

#### ON - OFF Endurance Class A+

Torque lbs.in	Duty Performance running time/hour	Endurance <sup>(2)</sup> number of cycles
< 890	15	20 000
891-6,200	15	20 000
6,201-22,120	15	10 000
22,121-88,500	15	5 000
> 88,500	15	2 000

(2) Endurance Higher Level than Standard EN 15714 - 2

### ENDURANCE CRITERIA

**B**

#### INCHING / POSITIONING Endurance Class B

Torque lbs.in	Duty Performance starts per hour	Endurance <sup>(1)</sup> number of cycles
< 890	30	10 000
891-6,200	20	10 000
6,201-22,120	15	5 000
22,121-88,500	10	2 500
> 88,500	5	1 000

(1) Endurance Test Requirement Standard EN 15714 - 2

**B+**

#### INCHING / POSITIONING Endurance Class B+

Torque lbs.in	Duty Performance starts per hour	Endurance <sup>(2)</sup> number of cycles
< 890	30	20 000
891-6,200	20	20 000
6,201-22,120	15	10 000
22,121-88,500	10	5 000
> 88,500	5	2 000

(2) Endurance Higher Level than Standard EN 15714 - 2

### DEFINITIONS

- Torque is based on EN ISO 5210
- One cycle consists of 25 turns in both directions (i.e. 25 turns to open + 25 turns to close), based on an average load of at least 30 % of the rated torque with the ability to transmit 100 % of the rated torque for at least 10 % of the travel.
- One start consists of a movement of at least 1 % of travel in either direction, with a load of at least 30 % of the rated torque.
- TBA: To be agreed between manufacturer / supplier and purchaser.

# Design requirements per classes



## Class C Modulating

### MODULATING EN 15714 - 2 Standard Duty Class C

Torque lbs.in	Duty <sup>(1)</sup> Performance starts per hour	Endurance number of starts
< 890	1 200	1 800 000
891-6,200	600	1 200 000
6,201-22,120	300	500 000
22,121-88,500	60	250 000
> 88,500	30	T. B. A.

(1) Duty Performance Standard EN 15714 - 2



## Class D Continuous Modulating

### CONTINUOUS MODULATING EN 15714 - 2 Standard Duty Class D

Torque lbs.in	Duty Performance starts per hour	Endurance <sup>(1)</sup> number of starts
< 890	3 600	10 000 000
891-6,200	1 800	10 000 000
6,201-22,120	600	5 000 000
22,121-88,500	N.A.	T. B. A.
> 88,500	N.A.	T. B. A.

(1) Endurance Test Requirement Standard EN 15714 - 2

## PERFORMANCE CRITERIA

### III

MODULATING Performance Class III			Additional performance criteria				
Torque lbs.in	Duty <sup>(2)</sup> Performance starts per hour	Endurance number of starts	Resolution % and Number step mini	Dead band % Maxi	Reponse time sec	Linearity %	
< 890	1 200	1 800 000	<2%	50	±1%	<2s	2%
891-6,200	1 200	1 200 000	<2%	50	±1%	<2s	2%
6,201-22,120	300	500 000	<2%	50	±1%	<2s	2%
22,121-88,500	60	250 000	<2%	50	±1%	<2s	2%
> 88,500	30	T. B. A.	<2%	50	±1%	<2s	2%

(2) Duty Performance Higher Level than Standard EN 15714 - 2

### III+

MODULATING Performance Class III+			Additional performance criteria				
Torque lbs.in	Duty <sup>(2)</sup> Performance starts per hour	Endurance <sup>(2)</sup> number of starts	Resolution % and Number step mini	Dead band % Maxi	Reponse time sec	Linearity %	
< 890	1 200	3 000 000	<1%	100	±0.5%	<2s	2%
891-6,200	1 200	2 000 000	<1%	100	±0.5%	<2s	2%
6,201-22,120	300	1 000 000	<1%	100	±0.5%	<2s	2%
22,121-88,500	60	500 000	<1%	100	±0.5%	<5s	2%
> 88,500	30	T. B. A.	<1%	100	±0.5%	<10s	2%

(2) Duty Performance and Endurance Higher Level than Standard EN 15714 - 2

## PERFORMANCE CRITERIA

### II

CONTINUOUS MODULATING Performance Class II			Additional performance criteria				
Torque lbs.in	Duty Performance starts per hour	Endurance <sup>(2)</sup> number of starts	Resolution % and Number step mini	Dead band % Maxi	Reponse time sec	Linearity %	
< 890	3 600	10 000 000	<1.5%	67	±0.75%	<2s	2%
891-6,200	1 800	10 000 000	<1.5%	67	±0.75%	<2s	2%
6,201-22,120	600	5 000 000	<1.5%	67	±0.75%	<2s	2%
22,121-88,500	N.A.	T. B. A.	<1.5%	67	±0.75%	<2s	2%
> 88,500	N.A.	T. B. A.	<1.5%	67	±0.75%	<2s	2%

(2) Endurance Test Requirement Standard EN 15714 - 2

### II+

CONTINUOUS MODULATING Performance Class II+			Additional performance criteria				
Torque lbs.in	Duty Performance starts per hour	Endurance <sup>(2)</sup> number of starts	Resolution % and Number step mini	Dead band % Maxi	Reponse time sec	Linearity %	
< 890	3 600	20 000 000	<1%	100	±0.5%	<2s	2%
891-6,200	1 800	10 000 000	<1%	100	±0.5%	<2s	2%
6,201-22,120	600	5 000 000	<1%	100	±0.5%	<2s	2%
22,121-88,500	N.A.	T. B. A.	<1%	100	±0.5%	<5s	2%
> 88,500	N.A.	T. B. A.	<1%	100	±0.5%	<10s	2%

(2) Endurance Higher Level than Standard EN 15714 - 2

### I

CONTINUOUS MODULATING Performance Class I			Additional performance criteria				
Torque lbs.in	Duty Performance starts per hour	Endurance <sup>(2)</sup> number of starts	Resolution % and Number step mini	Dead band % Maxi	Reponse time sec	Linearity %	
< 890	3 600	50 000 000	<0.25%	400	±0.13%	<1s	2%
891-6,200	1 800	20 000 000	<0.25%	400	±0.13%	<1s	2%
6,201-22,120	600	5 000 000	<0.25%	400	±0.13%	<1s	2%
22,121-88,500	N.A.	T. B. A.	<0.25%	400	±0.13%	<2s	2%
> 88,500	N.A.	T. B. A.	<0.25%	400	±0.13%	<3s	2%

(2) Endurance Higher Level than Standard EN 15714 - 2



# Linear Actuator

Actuator duty  
STANDARD CLASSIFICATION



## Class A On - Off

ON - OFF		EN 15714 - 2
Standard Duty Class A		
Thrust lbf	Duty Performance running time/hour	Endurance <sup>(1)</sup> number of cycles
<4700	15	10 000
4700 to 15700	10	10 000
15700 to 33700	5	5 000
33701 to 73000	5	2 500
>73000	5	1 000

(1) Endurance Test Requirement Standard EN 15714 - 2



## Class B Inching / Positioning

INCHING / POSITIONING		EN 15714 - 2
Standard Duty Class B		
Thrust lbf	Duty Performance starts per hour	Endurance <sup>(1)</sup> number of cycles
<4700	30	10 000
4700 to 15700	15	10 000
15700 to 33700	10	5 000
33701 to 73000	10	2 500
>73000	10	1 000

(1) Endurance Test Requirement Standard EN 15714 - 2

Process Requirements  
BC DUTY & MODULATING CLASSIFICATION

### ENDURANCE CRITERIA

**A**

ON - OFF		Endurance Class A
Thrust lbf	Duty Performance running time/hour	Endurance <sup>(1)</sup> number of cycles
<4700	15	10 000
4700 to 15700	10	10 000
15700 to 33700	5	5 000
33701 to 73000	5	2 500
>73000	5	1 000

(1) Endurance Test Requirement Standard EN 15714 - 2

**A+**

ON - OFF		Endurance Class A+
Thrust lbf	Duty Performance running time/hour	Endurance <sup>(2)</sup> number of cycles
<4700	15	20 000
4700 to 15700	10	20 000
15700 to 33700	5	10 000
33701 to 73000	5	5 000
>73000	5	2 000

(2) Endurance Higher Level than Standard EN 15714 - 2

### ENDURANCE CRITERIA

**B**

INCHING / POSITIONING		Endurance Class B
Thrust lbf	Duty Performance starts per hour	Endurance <sup>(1)</sup> number of cycles
<4700	30	10 000
4700 to 15700	15	10 000
15700 to 33700	10	5 000
33701 to 73000	10	2 500
>73000	10	1 000

(1) Endurance Test Requirement Standard EN 15714 - 2

**B+**

INCHING / POSITIONING		Endurance Class B+
Thrust lbf	Duty Performance starts per hour	Endurance <sup>(2)</sup> number of cycles
<4700	30	20 000
4700 to 15700	15	20 000
15700 to 33700	10	10 000
33701 to 73000	10	5 000
>73000	10	1 000

(2) Endurance Higher Level than Standard EN 15714 - 2

### DEFINITIONS

- Thrust is based on EN ISO 5210
- One cycle consists in a stroke of 40 mm, or in a minimum stroke (H) given in Table 5, in both directions (i.e. 40 mm to open + 40 mm to close), based on an average load of at least 30 % of the rated thrust with the ability to transmit 100 % of the rated thrust for at least 10 % of the travel.
- One start consists of a movement of at least 1 % of the stroke in either direction, with a load of at least 30 % of the rated thrust.
- TBA: To be agreed between manufacturer / supplier and purchaser.

# Design requirements per classes



## Class C Modulating

### MODULATING EN 15714 - 2 Standard Duty Class C

Thrust lbf	Duty <sup>(1)</sup> Performance starts per hour	Endurance number of starts
<4700	1 200	1 800 000
4700 to 15700	600	1 200 000
15700 to 33700	60	500 000
33701 to 73000	60	250 000
>73000	60	T. B. A.

(1) Duty Performance Standard EN 15714 - 2



## Class D Continuous Modulating

### CONTINUOUS MODULATING EN 15714 - 2 Standard Duty Class D

Thrust kN	Duty Performance starts per hour	Endurance <sup>(1)</sup> number of starts
<4700	3 600	10 000 000
4700 to 15700	1 800	10 000 000
15700 to 33700	T. B. A.	5 000 000
33701 to 73000	T. B. A.	T. B. A.
>73000	T. B. A.	T. B. A.

(1) Endurance Test Requirement Standard EN 15714 - 2

## PERFORMANCE CRITERIA

### III

MODULATING Performance Class III			Additional performance criteria				
Thrust lbf	Duty <sup>(2)</sup> Performance starts per hour	Endurance number of starts	Resolution % and Number step mini	Dead band % (Maxi)	Reponse time sec	Linearity %	
<4700	1 200	1 800 000	<2%	50	±1%	<2s	2%
4700 to 15700	1 200	1 200 000	<2%	50	±1%	<2s	2%
15700 to 33700	300	500 000	<2%	50	±1%	<2s	2%
33701 to 73000	60	250 000	<2%	50	±1%	<2s	2%
>73000	60	T. B. A.	<2%	50	±1%	<2s	2%

(2) Duty Performance Higher Level than Standard EN 15714 - 2

## PERFORMANCE CRITERIA

### II

CONTINUOUS MODULATING Performance Class II			Additional performance criteria				
Thrust lbf	Duty Performance starts per hour	Endurance number of starts	Resolution % and Number step mini	Dead band % (Maxi)	Reponse time sec	Linearity %	
<4700	3 600	10 000 000	<1.5%	67	±0.75%	<2s	2%
4700 to 15700	1 800	10 000 000	<1.5%	67	±0.75%	<2s	2%
15700 to 33700	T. B. A.	5 000 000	<1.5%	67	±0.75%	<2s	2%
33701 to 73000	T. B. A.	T. B. A.	<1.5%	67	±0.75%	<2s	2%
>73000	T. B. A.	T. B. A.	<1.5%	67	±0.75%	<2s	2%

(2) Endurance Test Requirement Standard EN 15714 - 2

### III+

MODULATING Performance Class III+			Additional performance criteria				
Thrust lbf	Duty <sup>(2)</sup> Performance starts per hour	Endurance <sup>(2)</sup> number of starts	Resolution % and Number step mini	Dead band % (Maxi)	Reponse time sec	Linearity %	
<4700	1 200	3 000 000	<1%	100	±0.5%	<2s	2%
4700 to 15700	1 200	2 000 000	<1%	100	±0.5%	<2s	2%
15700 to 33700	300	1 000 000	<1%	100	±0.5%	<2s	2%
33701 to 73000	60	500 000	<1%	100	±0.5%	<5s	2%
>73000	60	T. B. A.	<1%	100	±0.5%	<10s	2%

(2) Duty Performance and Endurance Higher Level than Standard EN 15714 - 2

### II+

CONTINUOUS MODULATING Performance Class II+			Additional performance criteria				
Thrust lbf	Duty Performance starts per hour	Endurance <sup>(2)</sup> number of starts	Resolution % and Number step mini	Dead band % (Maxi)	Reponse time sec	Linearity %	
<4700	3 600	20 000 000	<1%	100	±0.5%	<2s	2%
4700 to 15700	1 800	10 000 000	<1%	100	±0.5%	<2s	2%
15700 to 33700	T. B. A.	5 000 000	<1%	100	±0.5%	<2s	2%
33701 to 73000	T. B. A.	T. B. A.	<1%	100	±0.5%	<5s	2%
>73000	T. B. A.	T. B. A.	<1%	100	±0.5%	<10s	2%

(2) Endurance Higher Level than Standard EN 15714 - 2

### I

CONTINUOUS MODULATING Performance Class I			Additional performance criteria				
Thrust lbf	Duty Performance starts per hour	Endurance <sup>(2)</sup> number of starts	Resolution % and Number step mini	Dead band % (Maxi)	Reponse time sec	Linearity %	
<4700	3 600	50 000 000	<0.25%	400	±0.13%	<1s	2%
4700 to 15700	1 800	20 000 000	<0.25%	400	±0.13%	<1s	2%
15700 to 33700	T. B. A.	5 000 000	<0.25%	400	±0.13%	<1s	2%
33701 to 73000	T. B. A.	T. B. A.	<0.25%	400	±0.13%	<2s	2%
>73000	T. B. A.	T. B. A.	<0.25%	400	±0.13%	<3s	2%

(2) Endurance Higher Level than Standard EN 15714 - 2

# BC Ranges Overview


## The essentials




For moderate environment, moderate operational constraints, standard applications.

### WEATHERPROOF RANGES

#### → Quarter-turn AQ RANGE



#### → Multi-turn AT RANGE




## The complete

For severe environment, demanding operational constraints, critical applications.


### WEATHERPROOF RANGES

#### → Quarter-turn SQ RANGE




<sup>(1)</sup> Long operating time (min 25s)

#### → Multi-turn BT RANGE



#### → Multi-turn ST RANGE

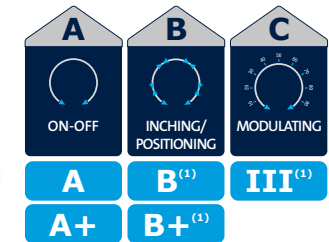


<sup>(1)</sup> Low speed motor (max 1 500 rpm)

## FOCUS ON CONTROLS AND APPLICATIONS



### New LOGIC V2

The main functions you expect from modern integrated controls



### New INTELLI+® V3


Advanced control solution for your critical applications!

# solution




## EXPLOSIONPROOF RANGES

### → Quarter-turn SOX RANGE



<sup>(1)</sup> Long operating time (min 25s)

### → Multi-turn STX RANGE



<sup>(1)</sup> Low speed motor (max 1 500 rpm)


## SPECIAL DESIGN & EXPERTISE

### → Nuclear Actuators: NUCLEAR QUALIFIED RANGES



Please consult our Nuclear Actuators catalogue for detailed information about SN and other qualified ranges.

### → Failsafe Actuators: FQ RANGE



<sup>(1)</sup> Low speed motor (max 1 500 rpm)


### → Continuous Modulating Actuators: BC MODULATING RANGE

OAP, MA, MB, MAS, MBS, SQXM & STXM MODELS




### → Special Actuator & Customisation

- Special Actuators for severe environments
- Hydraulic Multi-turn Actuators for LNG carriers & Offshore applications
- Customized Design & Projects

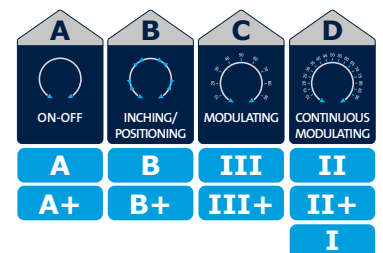

All Classes available on demand



**BC App:**  
The only application that allows not only to set up your actuator in a few clicks, but also to improve the reliability of your process thanks to key features and data for preventive maintenance



# FOCUS ON

## BC Technologies & Services

BERNARD CONTROLS technologies are the result of years of return on experience and customer feedbacks. These have led to actuators with heavy-duty mechanical design and increased security through performing electronics.

### > Gear transmission system

High transmission efficiency & self-locking capacity

Electric actuators generally use a worm drive because of its advantages of high drive ratio and self-locking. The mechanical design of BC actuators combines worm drive and high transmission efficiency planetary, in order to reduce the motor's power consumption, optimize handwheel transmission and to be self-locking at all speed.




### > Travel limitation systems

User-friendly & reliable travel limitation system

Bernard Controls proposes a patented cam block system, which offers the following advantages:

- > Fast & easy setting
- > Vibration proof
- > Precise indication



### > Torque limiters

User-friendly & reliable torque limitation system

Bernard Controls design of torque limiters is using proven technology offering:

- > Full reliability
- > Ease of adjustment
- > High precision & repeatability



### > Manual override

Easy maintenance with BC manual override technology

Depending on the markets and types of facilities, the features of emergency manual control - key functions of the actuator - can be very different. However, several features have a prime significance: it must be possible to operate the handwheel at any time & the number of turns on the handwheel must not be too high.


### > S4 Motor Duty cycle

The only representative duty cycle for electric actuator operation

The IEC 34 standard defines the electric motors' standard duty cycles. S2 duty rating is short time duty: motors adapt to constant load. Temperature rises fast during the operation and quickly reaches its limit. Motor needs long stop for total cooling between each start.

S4 duty cycle is intermittent duty with starting. Motors start with a large output torque. Temperature slowly decreases once operating torque has been reached. Therefore, the motor can be restarted shortly after shutdown.

BC has chosen the S4 duty rating because it is the most representative duty cycle for actuators operations.

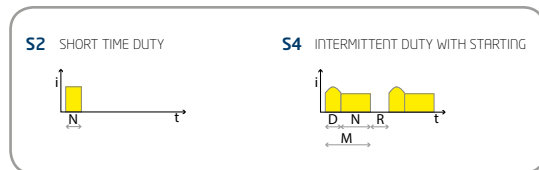

IEC 34 S2 & S4 Motor Duty Cycles

## > INTELLI+® control



INTELLI+® is an intuitive and intelligent integrated control which offers key benefits to end users:

- **Non-intrusive settings**
- **Intuitive interface** with local LCD display and easy-to-use menu
- **Accurate information** with absolute sensors, which constantly measure the position and torque of the valve
- **Increased security** with constant self-monitoring, ESD, Partial Stroke Test (PST), Alarms indication, signaling continuity...
- **Preventive maintenance:** INTELLI+® continuously monitors its components as well as the actuator status and measures some important valve parameters. It provides users with a great deal of information to help with system diagnosis, aid in scheduling their valves preventative maintenance and maximize process availability by reducing maintenance downtime. INTELLI+® permanently monitors the required torque necessary to operate the valve, memorizing these torque values generated during the last open and close operations.
- **Infra-red/Bluetooth communication** with PC and tablet via INTELLISOFT software to collect data, implement settings/configuration...



*A new version of INTELLI+® V3 will be launched with a new AT & BT range!*

## > Open fieldbus systems

### Easy site management

BC chooses the «open» fieldbus system for all its fieldbus solutions.

Our actuators can be connected to most of the standard fieldbus available on the market: PROFIBUS DP, FOUNDATION FIELDBUS, MODBUS RTU, HART and other fieldbus on demand.

For more security, redundant fieldbus ensures continuous operation, even in case of a bus line disruption.

## > ESD

### Increased security on site

ESD (Emergency Shut Down) is a remote emergency control signal with priority over all other commands in order to protect the pipeline and equipment from damage. Depending upon the valve operation, **ESD can be configured as an Open, Close or Stop command.**

## > SIL Design



### More than safety commands, SIL certified signaling functions

The SIL - Safety Integrity Level - is a measure of the level of security provided by a technical measurement of a risk control system (cf. IEC 61508 & 61511 standards). BC offers weatherproof & explosionproof quarter-turn and multi-turn actuators specially designed (fully dedicated control board and absolute position encoder with built-in self-test) and SIL certified according to the latest & more demanding revision of the standard (Ed 2).

## > Recognised expertise

Our company has been **approved by major end users and engineering companies:**

- ADNOC, ALSTOM POWER, AREVA, BLUE CIRCLE, ENEL, EDF, ESKOM, GAZ DE FRANCE, KNPC, KOC, LAFARGE, NIOC, PETROBRAS, QATAR PETROLEUM, SAUDI ARAMCO, SHELL, SOFRESID, TRACTEBEL, TECHNIP, TOTAL (...)

Our products and organization have been **certified by major international bodies and according to main standards:**

- ISO 9001, ISO 14001, OHSAS 18001
- ATEX, NEMA, IEEE, RCC-E, SIL (...)
- ABS, CSA, BUREAU VERITAS, GERMANISCHER LLOYDS, EAC Customs Union, INERIS, TÜV (...)

## > Strong Customer Support

From the design stage to installation, commissioning,



maintenance and training, BERNARD CONTROLS teams are truly dedicated to your satisfaction and commits to delivering **strong customer support everywhere around the globe.**



# > General specifications

		AQ	SQ	
TORQUE	<b>Type of rotation (max. torque)</b> Quarter turn Multi turn	88 500 lbs.in -	35 400 lbs.in -	
	ENVIRONMENT	<b>Location</b> Indoors Outdoors Risk of submersion IP68 In an explosive atmosphere	IP68 / NEMA 6 IP68 / NEMA 6 2 metres, 24 hours -	IP67 / NEMA 4 IP67 / NEMA 4 5 metres, 72 hours <sup>(3)</sup> -
<b>Operating temperature</b> Standard High temperature version Low temperature version Anti-condensation system		-4...+140° F - - Standard	-4...+158° F 32...+194° F -40...+122° F Standard	
<b>Enclosure corrosion protection</b> Indoor Outdoors highly corrosive industrial Very highly corrosive industrial or off-shore		● - -	● ● ●	
<b>Conditions of vibration 10-500 Hz</b>		≤1g	≤1g	
OPERATION		<b>Duty &amp; Modulating Classification</b> Comply with EN15714-2 Class A: On-Off Comply with EN15714-2 Class B: Inching/Positioning Comply with EN15714-2 Class C: Modulating Comply with EN15714-2 Class D: Continuous Modulating	A B III (except AQL) -	A/A+ B/B+ III -
	MOTOR & TECHNOLOGY	<b>Motor technology</b> Insulation class	F (except AQL)	F
		<b>Operating motor duty cycle</b> BC Classes A & A+ complying with EN15714-2 Class A BC Classes B & B+ complying with EN15714-2 Class B BC Classes III & III+ complying with EN15714-2 Class C BC Classes II, II+ & I complying with EN15714-2 Class D	S4-30% S4-30% S4-50% (except AQL) -	S4-30% S4-30% S4-50% -
		<b>Actuator technology/material</b> Self-locking drive gears Housing Manual override with priority to electric drive Declutch-free manual override Adjustable mechanical end stops (90°+/-2°)	● Alloy/Aluminium ● ● <sup>(3)</sup> ●	● Alloy/Aluminium ● ● <sup>(3)</sup> ●
INTERFACES		<b>Power supply</b> 3PH 400VAC-50Hz / 460VAC-60Hz 1PH 230VAC-50Hz / 115 VAC-60Hz 24VDC Other supply voltage	● ● ● -	● ● ● On request
	<b>Valve-actuator standard interface</b>	ISO 5211	ISO 5211	
	<b>Standard cable entries (other on request)</b>	2 x ISO M20 or 2 x NPT 3/4"	2x NPT 3/4"	
CONTROLS	<b>Type of controls</b> Electromechanical SWITCH (option position transmitter, positioner, local command) Integrated controls Intelligent controls	● LOGIC V2 -	● INTEGRAL+/POSIGAM+ INTELLI+®	
	<b>Fieldbus communication / Integrated controls INTEGRAL+ (Profibus DP)</b>	-	●	
	<b>Fieldbus communication / Intelligent controls INTELLI+® (Modbus RTU, Devicenet, Profibus DPV1, Fieldbus Foundation, Hart...)</b>	-	●	

For specifications of AT & BT ranges, please contact us.

SQX	ST/ASM	STX	Continuous Modulating	FQ
35 400 lbs.in -	4 425 300 lbs.in 177 000 lbs.in	7 080 600 lbs.in 177 000 lbs.in	265 500 lbs.in 17 700 lbs.in	4420 lbs.in -
IP68 / NEMA 6 IP68 / NEMA 6 10 metres, 96 hours NEMA7/9, ATEX...	IP68 / NEMA 6 <sup>(1)</sup> IP68 / NEMA 6 <sup>(1)</sup> 5 metres, 72 hours <sup>(1)</sup> -	IP68 / NEMA 6 IP68 / NEMA 6 10 metres, 96 hours NEMA7/9, ATEX...	IP67 / NEMA 4 IP67 / NEMA 4 5 metres, 72 hours <sup>(4)</sup> NEMA7/9, ATEX...	IP67 / NEMA 4 IP67 / NEMA 4 5 metres, 72 hours <sup>(7)</sup> NEMA7/9, ATEX...
-4...+158° F - -76...+158° F Standard	-4...+158° F 32...+194° F -40...+122° F Standard	-4...+158° F - -76...+158° F Standard	-4...+158° F - -40...+122° F <sup>(4)</sup> Standard <sup>(5)</sup>	-4...+158° F 32...+194° F -40...+122° F Standard
● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
≤1g	≤1g	≤1g	≤1g	≤1g
A/A+ B/B+ III -	A/A+ B/B+ III -	A/A+ B/B+ III -	- - - II	A B III -
F	F	F	F	F
S4-30% S4-30% S4-50% -	S4-30% S4-30% S4-50% -	S4-30% S4-30% S4-50% -	- - - S4-100%	S4-30% S4-30% S4-50% -
● Alloy/Aluminium ● ● ●	● <sup>(2)</sup> Alloy/Aluminium ● ● <sup>(3)</sup> -	● Alloy/Aluminium ● ● -	● Alloy/Aluminium ● ● ●	● Alloy/Aluminium ● ● ●
● ● ● On request	● ● On request On request	● ● ● On request	● ● ● On request	● ● ● On request
ISO 5211	ISO 5210	ISO 5210	ISO 5210/5211	ISO 5211
2 x NPT 1" + 1 x NPT 1"1/2	2 x ISO M20	2 x NPT 1" + 1 x NPT 1"1/2	3 x ISO M20 <sup>(6)</sup>	3x NPT 3/4"
● - INTELLI+®	● INTEGRAL+/POSIGAM+ INTELLI+®	● - INTELLI+®	● - INTELLI+®	● INTEGRAL+/POSIGAM+ -
-	●	-	-	●
●	●	●	●	-

<sup>(1)</sup> : As an option for ASM

<sup>(2)</sup> : Except ASM

<sup>(3)</sup> : Except AQL, SQ4-SQ15, ST6 & ASM

<sup>(4)</sup> : - 76 ... + 158° F for SQXM / STXM models

<sup>(7)</sup> : optional

<sup>(5)</sup> : Self - heating for SQXM / STXM models

<sup>(6)</sup> : 2 x ISO M20 + 1 x ISO M25 for MA / MAS SWITCH models. And 2 x NPT 1" + 1 x NPT 1"1/2 for SQXM / STXM models

## ➤ Control specifications

### Legend

- : Not Available

● : adapted or available (standard or optional)

	SWITCH	HARDWIRED	INTEGRAL+ POSIGAM+ Integrated	LOGIC V2 Integrated	INTELLI+® V2 <sup>(1)</sup> Intelligent	
MAIN FEATURES	Integrated motor reversing starters	-	●	●	●	
	Padlockable local controls	-	●	●	● (3)	
	Integrated or separated control box	-	●	●	Integrated Only	
	Operating mode					
	On-Off: open or close full stroke on average 20-30 times/day	●	●	INTEGRAL+	●	INTELLI+®
	Inching/Positioning: change position on average 20-30 times/day	●	Inching only	POSIGAM+	●	INTELLI+®
Modulating Class III: change position 360 times/day	●	-	POSIGAM+	●	INTELLI+®	
Intensive Modulating Class II: every 2 or 3 seconds positioning	-	-	-	-	INTELLI+®	
Timer (extended travel time)	-	-	●	-	●	
Power supply						
3 phase	●	●	●	●	●	
1 phase	●	-	●	●	●	
DC	●	-	●	●	●	
REMOTE CONTROL	On-off command mode (contacts)					
	Maintained contact	●	●	●	●	
	Pulse command	-	●	●	●	
	Analogue signal (4-20 mA or 0-10 V)	-	-	●	●	●
ESD - Emergency shutdown command	-	●	●	-	●	
Command by fieldbus	-	-	●	-	●	
SIGNALS	Open / close contacts	●	●	●	●	
	Proportional feedback signal (4-20 mA i.e)	Potentiometer or TAM transmitter	TAM or POT	●	●	
	Information relay	-	●	●	●	●
	Fault monitoring relay	-	●	●	●	●
	Signaling via fieldbus	-	-	●	-	●
PROTECTION	Fuses	-	●	●	●	
	Automatic phase detection (3 phases)	-	●	●	●	
	Motor thermal protection	●	●	●	●	●
	Adjustable torque limiter	● (2)	● (2)	● (2)	● (4)	●
ADDITIONAL FEATURES	Parameter setting	-	-	Intrusive with jumpers	Non intrusive display + some intrusive settings	Non intrusive display+selectors or PDA+infrared
	Position and torque setting mode	Mechanical	Mechanical	Mechanical	Mechanical	Non intrusive display+selectors or PDA+infrared
	Self-diagnosis	-	-	-	●	●
	Torque curve	-	-	-	-	●
	Actuator activity data	-	-	●	-	

(1) : New version V3 to be released soon

(2) : Except SQ4-SQ15

(3) : Electrical non Mechanical

(4) : Except AQ5-10-15

# BERNARD CONTROLS GROUP

## CORPORATE HEADQUARTERS

4 rue d'Arsonval - CS 70091 / 95505 Gonesse CEDEX France / Tel. : +33 (0)1 34 07 71 00 / Fax : +33 (0)1 34 07 71 01 / mail@bernardcontrols.com

## CONTACT BY OPERATING AREAS

### > AMERICA

#### NORTH AMERICA

BERNARD CONTROLS UNITED STATES  
HOUSTON  
inquiry.usa@bernardcontrols.com  
Tel. +1 281 578 66 66

#### SOUTH AMERICA

BERNARD CONTROLS LATIN AMERICA  
inquiry.southamerica@bernardcontrols.com  
Tel. +1 281 578 66 66

### > ASIA

#### CHINA

BERNARD CONTROLS CHINA &  
BERNARD CONTROLS CHINA NUCLEAR  
BEIJING  
inquiry.china@bernardcontrols.com  
Tel. +86 (0) 10 6789 2861

#### KOREA

BERNARD CONTROLS KOREA  
SEOUL  
inquiry.korea@bernardcontrols.com  
Tel. +82 (0)2 553 6957

#### SINGAPORE

BERNARD CONTROLS SINGAPORE  
SINGAPORE  
inquiry.singapore@bernardcontrols.com  
Tel. +65 65 654 227

### > EUROPE

#### BELGIUM

BERNARD CONTROLS BENELUX  
NIVELLES (BRUSSELS)  
inquiry.belgium@bernardcontrols.com  
inquiry.holland@bernardcontrols.com  
Tel. +32 (0)2 343 41 22

#### FRANCE

BERNARD CONTROLS FRANCE &  
BERNARD CONTROLS NUCLEAR FRANCE  
GONESSE (PARIS)  
inquiry.france@bernardcontrols.com  
Tel. +33 (0)1 34 07 71 00

#### GERMANY

BERNARD CONTROLS DEUFRA  
TROI SDORF (KÖLN)  
inquiry.germany@bernardcontrols.com  
Tel. +49 2241 9834 0

#### ITALY

BERNARD CONTROLS ITALIA  
RHO (MILANO)  
inquiry.italy@bernardcontrols.com  
Tel. +39 02 931 85 233

#### RUSSIA

BERNARD CONTROLS RUSSIA  
inquiry.russia@bernardcontrols.com  
Tel. +33 (0)1 34 07 71 00

#### SPAIN

BERNARD CONTROLS SPAIN  
MADRID  
inquiry.spain@bernardcontrols.com  
Tel. +34 91 30 41 139

### > INDIA, MIDDLE EAST & AFRICA

#### AFRICA

BERNARD CONTROLS AFRICA  
ABIDJAN - IVORY COAST  
inquiry.africa@bernardcontrols.com  
Tel. + 225 21 34 07 82


#### INDIA

BERNARD CONTROLS INDIA  
inquiry.india@bernardcontrols.com  
Tel. +971 4 880 0660

#### MIDDLE-EAST

BERNARD CONTROLS MIDDLE-EAST  
DUBAI - U.A.E.  
inquiry.middleeast@bernardcontrols.com  
Tel. +971 4 880 0660

More than 50 agents and distributors worldwide. Contact details on [www.bernardcontrols.com](http://www.bernardcontrols.com)



BERNARD<sup>®</sup>  
CONTROLS

[www.bernardcontrols.com](http://www.bernardcontrols.com)



# Specification sheet

## Valve and Actuator Technical Data

### VALVE DATA

**Operating Movement:**  quarter-turn  multi-turn - number of turns to close valve [.....]  linear [.....] in  
 DN [.....] **Type** [.....] **Pressure class** [.....]  
**Max. required torque :** [.....] lbs.in **or thrust:** [.....] lbs  **Safety fact. to be added** [.....] %  
**Closing:**  counter clockwise  clockwise  
**Flange:**  ISO5210 or ISO5211 standard size F [.....]  special [.....]  
**Quarter-turn output shaft:**  bore + keyway  double D  inside square  special (to be defined)  
 Dimensions: [.....] [.....] [.....] [.....]  
**Multi-turn output shaft:**  A form  B2 form  B3 form  C form  special (to be defined)  
 Dimensions: [.....] [.....] [.....] [.....] [.....]  
**Valve rising stem lift:** [.....] in **Pitch:** [.....] in **Lead:**  single  double

### ACTUATOR SPECIFICATIONS

#### > Protection

Installation  inside  outside **Protection**  IP67/NEMA 4  IP68/NEMA 6  
 Corrosive atmosphere Specify [.....]  Explosive atmosphere Specify [.....]  
 Humidity (anti-condensation heater)  Ambient temperature (in °F) [.....] MIN. [.....] MAX.  
 Paint Color: .....

#### > Operation

On-Off:  Class A  Class A+  
 Inching/positioning:  Class B  Class B+  
 Modulating:  Class III  Class III+  
 Continuous Modulating:  Class II  Class II+  Class I  
 Operating time [.....] seconds

#### > Motor

Type  DC  1 phase  3 phase **Voltage** [.....] VOLTS **Frequency** [.....] Hz  
 Incorporated thermal protection  Tropicalization

#### > Security

Failsafe spring return by loss of power supply  
 Manual handwheel  Taper square drive shaft instead of handwheel for manual key operation (Multi-turn)

#### > Control

Switch (reversing starters and control logic in customer cabinet)  
 Integrated version with built-in control logic reversing starters and local control  
 INTELLI+® version with built-in control logic reversing starters, local control, display  
 Proportional control (eg 4-20mA for example)  
**Command by fieldbus:**  Profibus DP  Profibus DP Red.  Foundation Fieldbus  Modbus RTU  
 HART  Other .....  
 ESD - Emergency shutdown command +  SIL Certified

#### > Electric connection

Cable gland x M20 **Number** [.....] **Other to specify** [.....]

#### > Signaling

	Open	Closed
<input type="checkbox"/> Auxiliary travel limit switches contact	Number [.....]	Number [.....]

 Position feedback signal 4-20 mA +  SIL Certified  
 Position feedback signal, potentiometer 1000 Ohms  
 Fault monitoring relay

### VARIOUS

Commissioning support  Training