


//////// Invest in Confidence //////////////////////////////////////

Weatherproof
Multi-turn Actuators
BT RANGE

> BT range

The complete solution for multi-turn electric actuation

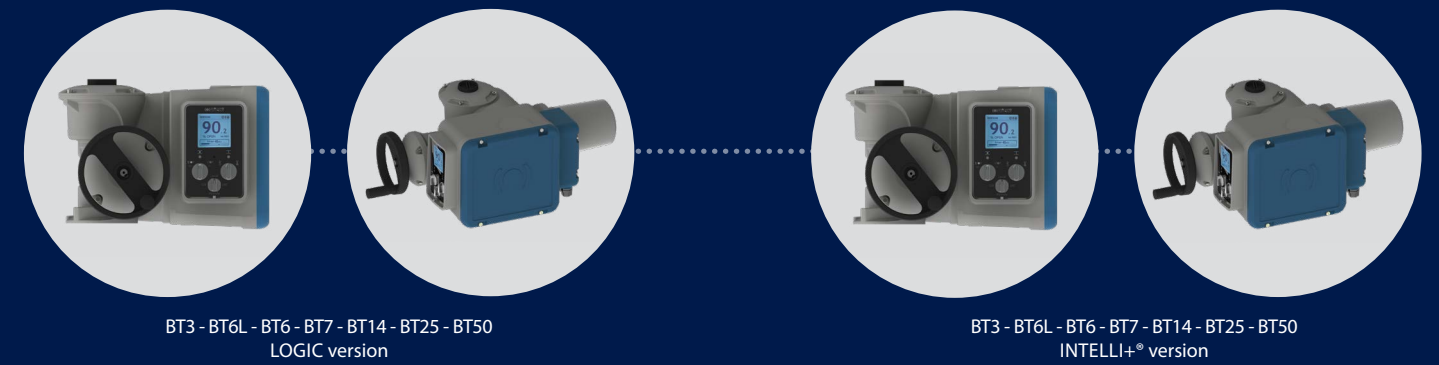

Product overview

Wide Stem Acceptance

- > suitable for rising stem thanks to a removable screw cap
- > easy & watertight fixation of the stem cover

Large LCD display

- Easily orientable in few clicks on the BC APP or through local commands

Declutch-free handwheel

- > with motor priority
- > with foldable handle
- > optional dual speed and motorization

New mobile application BC App

- "Set up your actuator and more in a few clicks!"
- > Set up & Operate your actuator using your mobile phone
 - > Get access to clear descriptions of alarms, troubleshooting functions, documentation, Bernard Controls Assistance
 - > Upload & change the full actuator configuration in one step
 - > Even complex settings are made easier

User-friendly wiring system

- > New terminal plate: easy wiring with identified function per pin whatever the options of your product
- > Quick connector option for easy maintenance

User-friendly local commands

through 2 buttons + 1 padlockable selector

Heavy duty design

Full aluminium enclosure protected by durable powder coating Grey & Azure Blue

Product benefits

MODULARITY DEDICATED TO PERFORMANCE

• Innovative, reliable & unique design

- > Fully new and unique design for Multi-turn actuation based on market requirements and BC design experience and methodology
- > Product architecture, torque range and speed range adapted to customers' requirements
- > Heavy duty design: IP68, double-sealing protection, powder coating (up to C5-M).
- > Innovative features: new camblock system unaffected by vibration, adjustable torque sensor, new design with internal modularity for compact solution...

• Enhanced performance for the most-demanding conditions

- > From 30Nm (adjustable to 12Nm) to 500Nm (direct) and more with gearboxes
- > Wide range of speed up to 180rpm to address all types of applications
- > Wide stem acceptance with an easy to install and watertight stem cover
- > Self-locking at all speed without any additional component*
- > High resolution modulating Class III+ (Duty Performance and Endurance Higher Level than Standard EN15714-2)
- > S4 Motor Service Duty on all models

• Easy to install & maintain

- > Easy commissioning: non-intrusive setting for LOGIC and INTELLI+® versions, quick connector option, configurable relays on electronic versions...
- > Large LCD display on electronic versions for user-friendly commissioning and local commands. Easily orientable (4-way direction) in few clicks
- > Declutch-free manual override for quick intervention on site
- > BC APP: Bernard Controls new mobile application for setting, operating, troubleshooting and easy access to documentation
- > Fieldbus available as an option, including common market standard protocols : Profibus (DPV1, Simple or Redundant), Modbus (Simple or Redundant)...

• INTELLI+® advanced control solution

- > User-friendly and intuitive controls with LCD display that gives a clear status of the actuator and of the control system
- > Advanced monitoring and diagnostic functions of INTELLI+® Integrated Control: Emergency Shut Down (ESD), Partial Stroke Test (PST), programmable timer, alarm customization, programmable signaling relays, operation monitoring...



>BT RANGE

Weatherproof Multi-turn Actuators

Range Overview

A new range of multi-turn electric actuators made up of 6 models with or without integrated controls



BT LOGIC

BT3-BT6L-BT6-BT7-BT14-BT25-BT50

- 1x110 VAC 50Hz
- 1x115/120 VAC 60Hz
- 1x220/230 VAC 50/60Hz
- 3x200/220 VAC 50/60Hz
- 3x230 VAC 50/60Hz
- 3x240 VAC 50Hz
- 3x360 VAC 60Hz
- 3x380/400 VAC 50/60Hz
- 3x415/550 VAC 50Hz
- 3x440 VAC 50/60Hz
- 3x460/480 VAC 60Hz
- 3x575/660 VAC 60Hz
- 3x600 VAC 50/60Hz
- Other voltages on request

On-Off Class A+ as standard

> OPTIONS

- +

Low temp. -40°
- +

Class B+
- +

Class III+
- +

Analog Positioner
- +

Position & Torque Transmitter
- +

4 additional signaling relays
- +

Profibus DPV1 Single
- +

Modbus RTU Single
- +

Quick connector
- +

C5 Protection
- +

Padlockable HMI protection
- +

Handwheel : dual speed and motorization (BT25 & BT50)



BT INTELLI+®

BT3-BT6L-BT6-BT7-BT14-BT25-BT50

- 1x110 VAC 50Hz
- 1x115/120 VAC 60Hz
- 1x220/230 VAC 50/60Hz
- 3x200/220 VAC 50/60Hz
- 3x230 VAC 50/60Hz
- 3x240 VAC 50Hz
- 3x360 VAC 60Hz
- 3x380/400 VAC 50/60Hz
- 3x415/550 VAC 50Hz
- 3x440 VAC 50/60Hz
- 3x460/480 VAC 60Hz
- 3x575/660 VAC 60Hz
- 3x600 VAC 50/60Hz
- Other voltages on request

On-Off Class A+ as standard

> OPTIONS

- +

Low temp. -40°
- +

Class B+
- +

Class III+
- +

Analog Positioner
- +

Position & Torque Transmitter
- +

4 additional signaling relays
- +

Profibus DPV1 Single or Redundant
- +

Modbus RTU Redundant
- +

Quick connector
- +

C5 Protection
- +

Padlockable HMI protection
- +

Handwheel : dual speed and motorization (BT25 & BT50)

Contents

Product specifications - BT LOGIC

4

Product specifications - BT INTELLI+®

9

BT LOGIC PRODUCT SPECIFICATIONS		
GENERAL	Description	All BT actuators include motor with thermal protection, gear case, emergency handwheel, position sensor, torque sensor and anti condensation heater. BT LOGIC models also include: • integrated controls • built-in motor reversing starters • local commands with large LCD display Wide range of number of turns: 4 à 2450
	Torque range	• BT3 = 12 to 30 Nm • BT6L = 24 to 60 Nm • BT6 = 24 to 60 Nm • BT7 = 7 to 70 Nm • BT14 = 56 to 140 Nm • BT25 = 100 to 250 Nm • BT50 = 200 to 500 Nm
	Duty Classification	Adapted to process requirements: • On-Off: Class A+ actuators complying with EN15714-2 (Class A with improved endurance) • Inching/Positioning: Class B+ actuators complying with EN15714-2 and with improved endurance • Modulating: Class III+ actuators with higher duty performance and specification of additional performance criteria compared to EN15714-2 Class C basic design requirements
ENCLOSURE - PROTECTION	Casing	• Aluminium casting • Cover fastened by captive and stainless screws
	External Protection	• Type: Powder coating • Protection: tested to C4 environments acc. to ISO 12944 • Durability (M) : 10 years • Option: highly corrosive conditions: up to C5 • Color: Grey & Blue - Other colors and finishes, please consult us
	Weatherproofness	IP68 NEMA 4X Relative humidity: 0 to 95%.
	Ambient temperature range	• -20...+70°C / -4 ... +158°F • -40°C (-40°F)
	Vibration resistance	1g (9.8 m/s ²) at 10-200 Hz. (Contact our sales teams for higher vibration levels)
MOTOR	Motor technology	• TENV design (Totally-enclosed, not ventilated) 3-phase or single-phase asynchronous motor, Class F insulation and Class B temperature rise; integrated thermal overload protection. • TENV DC motors with 2-wire connection available on request for some references
	Motor duty rating	• On/Off operation (Class A+): S4-30% and S2-15min (as a standard), S2-30min (on option) • Inching/Positioning (Class B+): S4-30% motor duty rating. Up to 360 starts per hour at peak of operation. S4-50% as option. • BC Modulating (Class III+): S4-50% motor duty rating. Up to 1 200 starts per hour at peak of operation. (Voltage ±10%, frequency ±2%)
MECHANICAL SPECIFICATIONS	Gear design	• Reduction by planetary gear and largely sized worm & wheel • The gears are mechanically self-locking (except BT25-BT50 127/180rpm)
	Manual emergency operation	Handwheel does not rotate during motor operation. • Automatic switch between manual and electrical. Priority to electric drive. • Manual control gear ratios: Standard ratio = between 11 and 55 depending on the model BT3 = ratio 30:1 BT3 = ratio 55:1 (speed 7 & 10 rpm) BT6L = ratio 30:1 BT6 = ratio 27:1 BT7 = ratio 1:1 BT14 = ratio 27:1 BT25 = ratio 29:1 (speed ≤ 96rpm) BT25 = ratio 11:1 (speed > 96rpm) BT50 = ratio 29:1 (speed ≤ 96rpm) BT50 = ratio 11:1 (speed > 96rpm) BT25 & BT50 = ratio 1:1 and 3:1 with dual speed option • Maximum rim force to apply conform to EN 12570

BT LOGIC PRODUCT SPECIFICATIONS		
MECHANICAL SPECIFICATIONS	Output flange	Actuator flanges comply with ISO 5210 (see corresponding output flange spreadsheet p.18)
	Lubrication	The actuators are oil lubricated for the product lifetime and do not require any periodic maintenance.
ELECTRICAL SPECIFICATIONS	Power supply	Actuators can operate on a wide variety of power supplies (see detail on technical handbook): <ul style="list-style-type: none">• single-phase or 3-phase, DC• up to 600 V• 50 or 60 Hz
	Bluetooth	Bluetooth (BLE 4.1) as standard
	Terminal compartment	<ul style="list-style-type: none">• All control elements are directly connected to Quick connect terminals• Internal and external earth ground rod.- up to 6mm²• Quick connector (on option)
	Fuse protection	FU1: transformer primary fuse 6,3 x 32mm - 0,5A-500V + 2 automatic resettable fuses FU2 - FU3: 50mA - 500mA
	Conduit entries	Without connector : <ul style="list-style-type: none">• 1 x M25 + 2x M20 or 3 x 3/4" NPT• on option : 4 x M20 or 4 x 1/2" NPT additionnal With connector : <ul style="list-style-type: none">• 1 x M25 + 6x M20 or 3 x 3/4" NPT + 4 x 1/2"NPT
POSITION & TORQUE SENSORS	Travel limit systems	<ul style="list-style-type: none">• Position: movement reading on the output shaft• Position sensor: Absolute encoder (Hall effect sensor)
	Torque limiting system	<ul style="list-style-type: none">• Direct mechanical torque measurement• Self maintained torque information• Absolute encoder sensor (Hall effect sensor)• The torque limiting system is calibrated at the factory. It remains ajustable via LOGIC• Non intrusive setting: ajustable torque from 40 to 100% of max torque
CONTROLS	Control	<ul style="list-style-type: none">• Isolated by opto-couplers• by Voltage: 10V to 60V; 90V to 250 VDC/AC (Current: 10mA at 24V)• by dry contacts (using actuator isolated 24 VDC supply)• Minimum pulse duration: 100ms• Time of rotational direction's change: 200ms
	Visual position indication	A LCD screen to display the position, the torque and alarms.
	Controls location	As standard, the LOGIC control is integrated into the actuator.
	Local command description	<ul style="list-style-type: none">• 2 buttons + 1 padlockable selector• A large LCD screen to display the position, the torque and alarms and to perform the settings• Green/Red: Configurable LED for CLOSED/OPEN
	Double sealing protection	The control compartment of the actuator is fully isolated from the wiring compartment
	Power circuit	Motor reversing starters (electromechanical controls for On-Off Class A+ / Inching-Positioning Class B+ / Modulating Class III+) On request: solid state relays
	Auxiliary power supply	24VDC as standard
	Signaling relay	<ul style="list-style-type: none">• 3 latching relays- Contact configuration: normally open or normally closed- Minimum current 10mA at 5V- Maximum current 5A at 250V or 5A at 30VDC (resistive load)Relay 1: Valve openRelay 2: Valve closedRelay 3: Configurable relay• Additional 4 relays board as an option
	Fault relay	<ul style="list-style-type: none">• Fault relay are pre-programmed (not configurable)• SPDT non latching relay, in fault position when not supplied.• Minimum current 10mA at 5V• Maximum current 5A at 250VAC or 5A at 30VDC (resistive load)

BT LOGIC PRODUCT SPECIFICATIONS		
CONTROLS	Proportional control (option)	LOGIC Analog Positioner : Signal configurations (with integrated analog output): <ul style="list-style-type: none">• Standard input signal: 4-20 mAPosition output signal: 4-20mA• Torque output signal: 4-20mAOther input signal (configurable): 0-20mA, 4-12mA, 12-20mA, 0-10VOther Position output signal (configurable): 2 wires: 4-20mA; 4-12mA; 12-20mA3/4 wires: 0-20mA; 4-20mA; 4-12mA; 12-20mAConfigurable input & output signal (direct/reverse)Analogue Input:<ul style="list-style-type: none">- in current: impedance of 260 Ohms- in voltage: impedance of 10 kOhmsAnalogue Output:<ul style="list-style-type: none">- in current: maximum acceptable load of 600 Ohms/24V, external supply12-32VDC
	Analog Transmitter (option)	Position & Torque transmitter Position output signal: 4-20mA Torque output signal: 4-20mA Other Position output signal (configurable): 2 wires: 4-20mA; 4-12mA; 12-20mA 3/4 wires: 0-20mA; 4-20mA; 4-12mA; 12-20mA Configurable signal (direct/reverse) Analogue Output: <ul style="list-style-type: none">- in current: maximum acceptable load of 600 Ohms/24V, external supply12-32VDC
SETTINGS	Settings	Non-Intrusive settings : <ul style="list-style-type: none">- Adjustable via Local control- Via BC application on mobile devices with secured Bluetooth connection (to keep a high level of security, Bluetooth range is limited to 10m). All actuator settings and parameters are stored in a non-volatile EEPROM memory. Protection by password.
	Local settings	The LOGIC can be fully set via its local display and selectors Does not require any specific setting tool Local/Off/Remote selector is padlockable Optionnal padlockable protection against sandy winds & vandalism.
	Application for mobile device	BERNARD CONTROLS new mobile application is available as standard, with its bluetooth secured communication interface, and allows the user to: <ul style="list-style-type: none">• Assistance to commissioning on valve• Simply set every parameters of the actuator (non-intrusive setting)• Command the actuator (open/close/stop) as a local control• Check at a glance an overview of the feedbacks information which are displayed on a large color screen of the mobile• Assistance to curative maintenance with a simple and efficient troubleshooting• Access to BERNARD CONTROLS contactinformation according to the area concerned• Access to the documentation relative to the selected and scanned actuator• Customize the actuator display• Duplicate one actuator configuration to another actuator• Check the actuator life operation• Select suitable language among 14 available languages• Identify the actuator operated valve by its valve tag and location process• Track the last user connections for traceability and safety reasons

BT LOGIC PRODUCT SPECIFICATIONS		
FIELD BUS	Profibus DPV1 (option)	<ul style="list-style-type: none">• PROFIBUS-DPV1 - RS 485• Baud rate: 9.6 kbit/s up to 1.5 Mbit/s (autodetection)• Communication protocol: PROFIBUS DPV1 slave-cyclic & acyclic• Type of connection: single line• Cable specification: Profibus certified cable only• Line connection without repeater<ul style="list-style-type: none">- Actuators per line: 31 max.- Line length: 1.2 km max. (0.75 mi)• Line connection with repeaters<ul style="list-style-type: none">- Number of repeaters per line: 9 max- 30 actuators and 1 Km max. per segment- Number of actuators per line with repeater: 120 maximum- Line length with 9 repeaters: 10.2 km max. (6.2 mi)• Scan speed (30 units & 1.2 km): 0.1s (at a baud rate of 93.75 Kbit/s)• Power supply: internal and isolated.24VDC emergency power supply to refresh Open/Close position information in case of loss of electric supply• Technical approval: operability approved by PNO (Profibus Nutzer Organisation)
	Modbus (option)	<ul style="list-style-type: none">• MODBUS RTU - RS 485• Transmission medium: 1 shielded pair cable• Functions: Half Duplex, asynchronous mode, multidrop• Baud rate: 1.2k to 115 Kbit/s• Format: 8 data bits, 1 stop bit, parity configurable• Communication protocol: Modbus (slave)• Modbus address: configurable by the actuator menu• Modbus loop (option operated with Master Station)
COMFORMITY TO EC DIRECTIVES	Compliance with EC Directives	BT actuators comply with: <ul style="list-style-type: none">• directive 2004/108/EC Electromagnetic compatibility• directive 2006/95/EC Low voltage• the following harmonised standards: EN 61000-6-4: Generic emissions standard for industrial environments; EN61000-6-2: Generic immunity standard for industrial environments; EN 60034-1: Rotating electrical machines; EN 60529: Degrees of protection provided by enclosures (IP ratings code)
OPTIONS	Options LOGIC	<ul style="list-style-type: none">• Low temp. -40°• Class B+• Class III+• Analog Positioner• Position & Torque Transmitter• 4 additional signaling relays• Profibus DPV1 Single• Modbus RTU Single• Quick connector• CS Protection• Padlockable HMI protection against sandy winds and vandalism• Dual speed and motorization option for BT25 & BT50



BT INTELLI+® PRODUCT SPECIFICATIONS		
GENERAL	Description	<p>All BT actuators include motor with thermal protection, gear case, emergency handwheel, position sensor, torque sensor and anti-condensation heater.</p> <p>BT INTELLI+® models also include:</p> <ul style="list-style-type: none">• integrated controls• built-in motor reversing starters• local commands with large LCD display <p>Wide range of number of turns: 3 à 2450</p> <p>INTELLI+® specificities:</p> <ul style="list-style-type: none">• NAMUR NE 107 signaling• Emergency Shut Down command• Partial Stroke Test• Speed control (timer)• Limitation of overtorque applied to valve seat• Optimised positioning precision by Intelli+ self-learning algorithm• Events log (last 50 alarms, ...)• 15 days log of environmental parameters:<ul style="list-style-type: none">- Temperature- Humidity- Actuator activity• Log of the last 50 valve torque curves• Log of the vibrations / shocks >2g• Overview of actuator lifetime temperature and vibration conditions and operation
	Torque range	<ul style="list-style-type: none">• BT3 = 12 to 30 Nm• BT6L = 24 to 60 Nm• BT6 = 24 to 60 Nm• BT7 = 7 to 70 Nm• BT14 = 56 to 140 Nm• BT25 = 100 to 250 Nm• BT50 = 200 to 500 Nm
	Duty Classification	<p>Adapted to process requirements:</p> <ul style="list-style-type: none">• On-Off: Class A+ actuators complying with EN15714-2 (Class A with improved endurance)• Inching/Positioning: Class B+ actuators complying with EN15714-2 and with improved endurance• Modulating: Class III+ actuators with higher duty performance and specification of additional performance criteria compared to EN15714-2 Class C basic design requirements
	Casing	<ul style="list-style-type: none">• Aluminium casting• Cover fastened by captive and stainless screws
ENCLOSURE - PROTECTION	External Protection	<ul style="list-style-type: none">• Type: Powder coating• Protection: tested to C4 environments acc. to ISO 12944• Durability (M) : 10 years• Option: highly corrosive conditions: up to C5• Color: Grey & BlueOther colors and finishes, please consult us
	Weatherproofness	IP68 NEMA 4X Relative humidity: 0 to 95%.
	Ambient temperature range	<ul style="list-style-type: none">• -20...+70°C / -4 ... +158°F• -40°C (-40°F) as an option
	Vibration resistance	1g (9.8 m/s ²) at 10-200 Hz. (Contact our sales teams for higher vibration levels)
	Motor technology	<ul style="list-style-type: none">• TENV design (Totally-enclosed, not ventilated) 3-phase or single-phase asynchronous motor, Class F insulation and Class B temperature rise; integrated thermal overload protection.• TENV DC motors with 2-wire connection available on request for some references
MOTOR	Motor duty rating	<ul style="list-style-type: none">• On/Off operation (Class A+): S4-30% and S2-15min (as a standard), S2-30min (on option)• Inching/Positioning (Class B+): S4-30% motor duty rating. Up to 360 starts per hour at peak of operation. S4-50% as option.• BC Modulating (Class III+): S4-50% motor duty rating. Up to 1 200 starts per hour at peak of operation. <p>(Voltage ±10%, frequency ±2%)</p>

BT INTELLI+® PRODUCT SPECIFICATIONS		
MECHANICAL SPECIFICATIONS	Gear design	<ul style="list-style-type: none">• Reduction by planetary gear and largely sized worm & wheel• The gears are mechanically self-locking (except BT25-BT50 127/180rpm)
	Manual emergency operation	Handwheel does not rotate during motor operation. <ul style="list-style-type: none">• Automatic switch between manual and electrical. Priority to electric drive.• Manual control gear ratios: Standard ratio = between 11 and 55 depending on the model BT3 = ratio 30:1 BT3 = ratio 55:1 (speed 7 & 10 rpm) BT6L = ratio 30:1 BT7 = ratio 1:1 BT6 = ratio 27:1 BT14 = ratio 27:1 BT25 = ratio 29:1 (speed ≤ 96rpm) BT25 = ratio 11:1 (speed > 96rpm) BT50 = ratio 29:1 (speed ≤ 96rpm) BT50 = ratio 11:1 (speed > 96rpm) BT25 & BT50 = ratio 1:1 and 3:1 with dual speed option• Maximum rim force to apply conform to EN 12570
	Output flange	Actuator flanges comply with ISO 5210 (see corresponding output flange spreadsheet p.18)
	Lubrication	The actuators are oil lubricated for the product lifetime and do not require any periodic maintenance.
ELECTRICAL SPECIFICATIONS	Power supply	Actuators can operate on a wide variety of power supplies (see detail on technical handbook): <ul style="list-style-type: none">• single-phase or 3-phase, DC• up to 600 V• 50 or 60 Hz
	Bluetooth	Bluetooth (BLE 4.1) as standard
	Terminal compartment	<ul style="list-style-type: none">• All control elements are directly connected to Quick connect terminals• Internal and external earth ground rod.- up to 6mm²• Quick connector (on option)
	Fuse protection	FU1: transformer primary fuse 6,3 x 32mm - 0,5A-500V + 2 automatic resettable fuses FU2 - FU3: 50mA - 500mA
	Conduit entries	Without connector : <ul style="list-style-type: none">• 1 x M25 + 2x M20 or 3 x 3/4" NPT• on option : 4 x M20 or 4 x 1/2" NPT additionnal With connector : <ul style="list-style-type: none">• 1 x M25 + 6x M20 or 3 x 3/4" NPT + 4 x 1/2" NPT
POSITION & TORQUE SENSORS	Travel limit systems	<ul style="list-style-type: none">• Position: movement reading on the output shaft• Position sensor: Absolute encoder (Hall effect sensor)
	Torque limiting system	<ul style="list-style-type: none">• Direct mechanical torque measurement• Self maintained torque information• Absolute encoder sensor (Hall effect sensor)• The torque limiting system is calibrated in factory. It remains ajustable via INTELLI+® (non intrusive setting)• Non intrusive setting: ajustable torque from 40 to 100% of max torque
CONTROLS	Control	<ul style="list-style-type: none">• Isolated by opto-couplers• by Voltage: 10V to 60V; 90V to 250 VDC/AC (Current: 10mA at 24V)• by dry contacts (using actuator isolated 24 VDC supply)• Minimum pulse duration: 100ms• Time of rotational direction's change: 200ms
	Visual position indication	A LCD screen to display the position, the torque and alarms.
	Local command description	<ul style="list-style-type: none">• 2 buttons + 1 padlockable selector• A large LCD screen to display the position, the torque and alarms and to perform the settings• Green/Red: Configurable LED for CLOSED/OPEN
	Controls location	As standard, the INTELLI+® control is integrated into the actuator. As an option, controls can be mounted in a separated box (max distance between actuator and controls 50m).

BT INTELLI+® PRODUCT SPECIFICATIONS		
CONTROLS	Double sealing protection	The control compartment of the actuator is fully isolated from the wiring compartment
	Power circuit	Motor reversing starters (electromechanical controls for On-Off Class A+ / Inching-Positioning Class B+ / Modulating Class III+) On request: solid state relays
	Auxiliary power supply	24VDC as standard
	Signaling relay	<ul style="list-style-type: none">• 3 latching relays- Contact configuration: normally open or normally closed- Minimum current 10mA at 5V- Maximum current 5A at 250V or 5A at 30VDC (resistive load)- Configurable relays• Additional 4 relays board as an optionAll configurable relays
	Fault relay	<ul style="list-style-type: none">• Fault relay configurable• SPDT nonlatching relay, in fault position when not supplied• Minimum current 10mA at 5V• Maximum current 5A at 250VAC or 5A at 30VDC (resistive load)
	Proportional control (option)	INTELLI+® Analog Positioner : Signal configurations (with integrated analog output): <ul style="list-style-type: none">• Standard input signal: 4-20 mAPosition output signal: 4-20mA• Torque output signal: 4-20mA Other input signal (configurable): 0-20mA, 4-12mA, 12-20mA, 0-10V Other Position output signal (configurable): 2 wires: 4-20mA; 4-12mA; 12-20mA 3/4 wires: 0-20mA; 4-20mA; 4-12mA; 12-20mA Configurable input & output signal (direct/reverse) Analogue Input: <ul style="list-style-type: none">- in current: impedance of 260 Ohms- in voltage: impedance of 10 kOhms: Analogue Output: <ul style="list-style-type: none">- in current: maximum acceptable load of 600 Ohms/24V, external supply 12-32VDC
	Analog Transmitter (option)	Position & Torque transmitter Position output signal: 4-20mA Torque output signal: 4-20mA Other Position output signal (configurable): 2 wires: 4-20mA; 4-12mA; 12-20mA 3/4 wires: 0-20mA; 4-20mA; 4-12mA; 12-20mA Configurable signal (direct/reverse) Analogue Output: <ul style="list-style-type: none">- in current: maximum acceptable load of 600 Ohms/24V, external supply 12-32VDC
SETTINGS	Settings	Non-Intrusive settings : <ul style="list-style-type: none">- Adjustable via Local control- Via BC application on mobile devices with secured Bluetooth connection (to keep a high level of security, Bluetooth range is limited). All actuator settings and parameters are stored in a non-volatile EEPROM memory. Protection by password.
	Local settings	The INTELLI+® can be fully set via its local display and selectors Does not require any specific setting tool Local/Off/Remote selector is padloackable Optionnal padlockable protection against sandy winds & vandalism.

BT INTELLI+® PRODUCT SPECIFICATIONS		
SETTINGS	Application for mobile device	<p>BERNARD CONTROLS new mobile application is available as standard, with its bluetooth secured communication interface, and allows the user to:</p> <ul style="list-style-type: none">• Assistance to commissioning on valve• Simply set every parameters of the actuator (non-intrusive setting)• Command the actuator (open/close/stop) as a local control• Check at a glance an overview of the feedbacks information which are displayed on a large color screen of the mobile• Assistance to curative maintenance with a simple and efficient troubleshooting• Access to BERNARD CONTROLS contact information according to the area concerned• Access to the documentation relative to the selected and scanned actuator• Customize the actuator display• Log the System Alarms and Warnings following NAMUR NE 107 codification• Duplicate one actuator configuration to another actuator• Check the actuator life operation• Select suitable language among 14 available languages• Identify the actuator operated valve by its valve tag and location process• Track the last user connections with date/time for traceability and safety reasons
FIELDBUS	Profibus DPV1 (option)	<ul style="list-style-type: none">• PROFIBUS-DPV1 - RS 485• Baud rate: 9.6 kbit/s up to 1.5 Mbit/s (autodetection)• Communication protocol: PROFIBUS DPV1 slave-cyclic & acyclic• Type of connection: single line or redundant line (redundant option)• Cable specification: Profibus certified cable only• Line connection without repeater<ul style="list-style-type: none">- Actuators per line: 31 max.- Line length: 1.2 km max. (0.75 mi)• Line connection with repeaters<ul style="list-style-type: none">- Number of repeaters per line: 9 max- 30 actuators and 1 Km max. per segment- Number of actuators per line with repeater: 124 maximum- Line length with 9 repeaters: 10.2 km max. (6.2 mi)• Scan speed (30 units & 1.2 km): 0.1s (at a baud rate of 93.75 Kbit/s)• Power supply: internal and isolated via INTELLI+®, 24VDC emergency power supply to refresh Open/Close position information in case of loss of electric supply• Technical approval: operability approved by PNO (Profibus Nutzer Organisation)• Redundancy available as an option• Bus continuity : keep bus continuity in case of actuator removal (option)
	Modbus Redundant (option)	<ul style="list-style-type: none">• MODBUS RTU - RS 485 Redundant• Transmission medium: 1 shielded pair cable• Functions: Half Duplex, asynchronous mode, multidrop• Baud rate: 1.2k to 115 Kbit/s• Format: 8 data bits, 1 stop bit, parity configurable• Communication protocol: Modbus (slave)• Modbus address: configurable by the actuator menu• Modbus loop
	HART (option)	<ul style="list-style-type: none">• Interface: HART, 4-20mA current, FSK modulation• Transfer speed: 1.2 kbit/s• Protocol: HART 7.4• Impedance: 250 Ohms• Power consumption: Internal by Intelli+ transformer, External power supply for 4-20mA loop only• Actuator configuration: Available through EDD file• Connection line: Point-to-Point or Multi-drop• Technical approval: approved by Hart Communication Foundation
	Other Fielbus (option)	Other fieldbus on request
COMFORMITY TO EC DIRECTIVES	Compliance with EC Directives	<p>BT actuators comply with:</p> <ul style="list-style-type: none">• directive 2004/108/EC Electromagnetic compatibility• directive 2006/95/EC Low voltage• the following harmonised standards: EN 61000-6-4: Generic emissions standard for industrial environments; EN61000-6-2: Generic immunity standard for industrial environments; EN 60034-1: Rotating electrical machines; EN 60529: Degrees of protection provided by enclosures (IP ratings code)


BT INTELLI+® PRODUCT SPECIFICATIONS		
OPTIONS	INTELLI+® Options	<ul style="list-style-type: none">• Low temp. -40°• Class B+• Class III+• Position & Torque Transmitter (current loop)• Analog Positioner• Fieldbus interface (Single or Redundant)• 4 additionnal signaling relays• Quick connector• Separated control box• C5 Protection• Padlockable HMI protection against sandy winds and vandalism• Dual speed and motorization option for BT25 & BT50

Output flanges

	C / B3 / B4 COUPLINGS	A / B1 / B2 COUPLINGS
BT3 / BT6L / BT7	F10	F07 and F10 (F05 on request)
BT6 / BT14	F10 standard / F14 as an option	F10 and F14
BT25 / BT50	F14 standard / F16 as an option	F14 standard / F16 as an option

//////// ACCESS TECHNICAL DATA

Scan the QR Code to access technical data such as motor data, dimentional drawings, wiring diagrams...



BERNARD CONTROLS GROUP

CORPORATE HEADQUARTERS

4 rue d'Arsonval - CS 70091 / 95505 Gonesse CEDEX France / Tel. : +33 (0)1 34 07 71 00 / Fax : +33 (0)1 34 07 71 01 / mail@bernardcontrols.com

CONTACT BY OPERATING AREAS

>AMERICAS

NORTH AMERICA
BERNARD CONTROLS UNITED STATES
HOUSTON
inquiry.usa@bernardcontrols.com
Tel. +1 281 578 66 66

SOUTH AMERICA
BERNARD CONTROLS LATIN AMERICA
inquiry.southamerica@bernardcontrols.com
Tel. +1 281 578 66 66

>ASIA

CHINA
BERNARD CONTROLS CHINA &
BERNARD CONTROLS CHINA NUCLEAR
BEIJING
inquiry.china@bernardcontrols.com
Tel. +86 (0) 10 6789 2861

KOREA
BERNARD CONTROLS KOREA
SEOUL
inquiry.korea@bernardcontrols.com
Tel. +82 (0)2 2183 6226

SINGAPORE
BERNARD CONTROLS SINGAPORE
SINGAPORE
inquiry.singapore@bernardcontrols.com
Tel. +65 65 654 227

>EUROPE

BELGIUM
BERNARD CONTROLS BENELUX
NIVELLES (BRUSSELS)
inquiry.belgium@bernardcontrols.com
inquiry.holland@bernardcontrols.com
Tel. +32 (0)2 343 41 22

FRANCE
BERNARD CONTROLS FRANCE &
BERNARD CONTROLS NUCLEAR FRANCE
GONESSE (PARIS)
inquiry.france@bernardcontrols.com
Tel. +33 (0)1 34 07 71 00

GERMANY
BERNARD CONTROLS DEUFRA
TROI SDORF (KÖLN)
inquiry.germany@bernardcontrols.com
Tel. +49 2241 9834 0

ITALY
BERNARD CONTROLS ITALIA
RHO (MILANO)
inquiry.italy@bernardcontrols.com
Tel. +39 02 931 85 233

SPAIN
BERNARD CONTROLS SPAIN
MADRID
inquiry.spain@bernardcontrols.com
Tel. +34 91 30 41 139

UNITED KINGDOM
BERNARD CONTROLS UNITED KINGDOM
inquiry.uk@bernardcontrols.com
Tel. +44 (0)7435 266310

>INDIA, MIDDLE EAST & AFRICA

AFRICA
BERNARD CONTROLS AFRICA
ABIDJAN - IVORY COAST
inquiry.africa@bernardcontrols.com
Tel. + 225 21 34 07 82

INDIA
BERNARD CONTROLS INDIA
inquiry.india@bernardcontrols.com
Tel. +971 4 880 0660

MIDDLE-EAST
BERNARD CONTROLS MIDDLE-EAST
DUBAI - U.A.E.
inquiry.middleeast@bernardcontrols.com
Tel. +971 4 880 0660

More than 50 agents and distributors worldwide. Contact details on www.bernardcontrols.com

BROCHURE_BT_ENG_GRP_rev02b
This document and the contents here of are proprietary to Bernard Controls. It can be amended and changed without prior notice. Any unauthorized reproduction is strictly prohibited.

